



SMARTElectrode 14.0.1.0

What's New



Enhancement

What


- Added new command to “Save Custom Base” to save userdefined feature (UDF) and data file for electrode blank.
- <https://redmine.buw-soft.de/issues/12001>

Why

- New command simplifies creation of customized base and saves a valid data file for it.

How

- Use command "Open Configuration" to browse to "electrode*<supplier>*\base_templates“ and select part to customize.
- Incorporate changes.
- Select "Save Base Template" to create UDF and data file.
- Customize data file.
- Copy UDF and DAT to supplier directory to activate template
- **NOTE:** All variable dimensions to be controlled in data file require a custom symbol name.
- **NOTE:** Open “Getting-Started” document for more information.




Enhancement

What

- Allow additional variable dimensions and parameters in blank data file (*.dat)
- <https://redmine.buw-soft.de/issues/9953>

Why

- Customer specific templates sometimes need to control additional dimensions or parameters – for example if holder or order number are part of electrode blank



How

- To use additional parameters with data file an additional line “VALUETYPE” has to be added between “INSTANCE” and blank sizes.

INSTANCE	A_BASE	B_BASE	FRAME_WIDTH	FRAME_HEIGHT	A_HOLDER	B_HOLDER	PARAMINT	PARAMSTRING	PARAMDOUBLE
VALUETYPE	DIM	DIM	DIM	DIM	DIM	DIM	INTEGER	STRING	DOUBLE
E-15-15	15	15	1	3.2	15	15	1515	E-15-15	15.15

- Available types:
 - DIM → Creo dimensions like A_BASE, B_BASE, LENGTH, base height D2 and additional dimensions
 - INTERN → internal values used for calculation and advanced settings like D1, D3, MATERIAL, MFG_TEMPLATE, HOLDER, ...
 - INTEGER → integer parameter
 - STRING → string parameter
 - DOUBLE → double parameter
- **NOTE:** more information can be found in “Getting-Started” presentation

Improvement

What

- Adjusted behavior for default values from parameter configuration.
- <https://redmine.buw-soft.de/issues/12025>

Why

- Until now there have been two different behaviors for default values if...
 - defined in sel_list.txt or

```
SPARK_MODE ... &priority
```

```
#PRIORITY  
Normal wear  
Low wear  
Normal wear  
High removal
```

- defined in parameter.cfg directly

```
SPARK_MODE ... Normal wear
```

How

Now in both cases...

- default value defined in parameter.cfg and
- default value defined in sel_list.txt

...the value from SMARTElectrode configuration will be used now. The value will be set regardless whether the parameter already exists in template for new electrodes or not.

Improvement

What


- Check and update mandatory options before drawings are created.

Why

- Drawing creation may fail if following options can't be set temporarily by SMARTElectrode
 - start_model_dir
 - drawing_view_origin_csys
 - drawing_warn_if_flex_feature
 - save_display

How

A warning will be displayed.

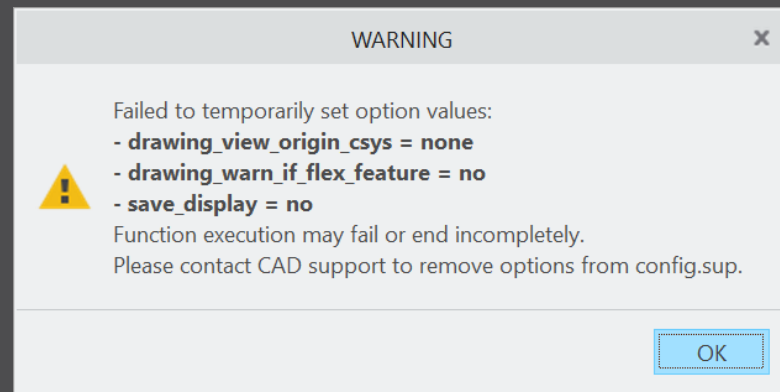

Fixed error

Description


- Operations/origins unreadable if group changed.
- <https://redmine.buw-soft.de/issues/12010>


Cause

- SMARTElectrode expects a fixed sequence order in operation groups:
 - Reference Csys (this is the selected csys)
 - Default Csys (orientation like selected csys on assembly default; used to assemble new electrodes on)
 - Freeface datum plane (default position of electrode base)
 - Default start datum plane (default start position of electrode if not defined otherwise)
 - Default secure datum plane (default secure position of electrode if not defined otherwise)
 - Operation cosmetic for drawing (optional)

Solution

- SMARTElectrode tries now to identify features in group, but it's still recommended to keep the group unchanged.

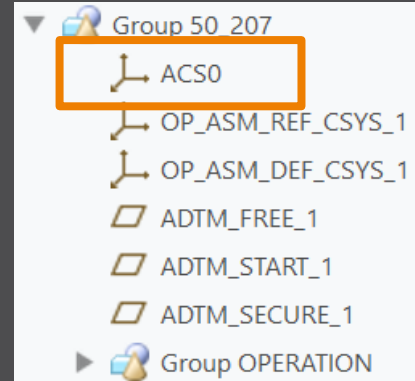

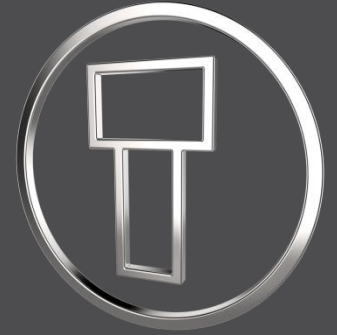

SMARTElectrode 14.0.0.0

What's New



Enhancement

What

- Disabled commands to convert electrode assemblies to Inseparable Assemblies
- <https://redmine.buw-soft.de/issues/11929>


Why

Commands are disabled because of limitations:

- Drawing creation / repeat regions for electrodes may fail
- Potential issues with userdefined features
- No reuse of embedded electrodes in other projects

How

- A warning appears if user executes >Inseparable Assemblies >Embed or >Model >Operations >Inseparable Assemblies >Make Inseparable

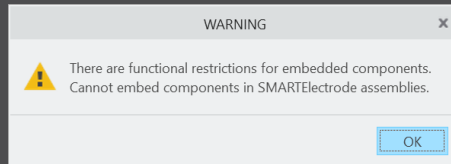

- SMARTElectrode does not process components already embedded in electrode assembly. Embedded components are not listed in burnsheets nor exported. A warning will be displayed in message window:
„Embedded component *<component name>* not processed in SMARTElectrode.“

Enhancement

What


- Added new command to “Save Custom Base” to save userdefined feature (UDF) and data file for electrode blank.
- <https://redmine.buw-soft.de/issues/12001>

Why

- New command simplifies creation of customized base and saves a valid data file for it.

How

- Use command "Open Configuration" to browse to "electrode*<supplier>*\base_templates“ and select part to customize.
- Incorporate changes.
- Select "Save Base Template" to create UDF and data file.
- Customize data file.
- Copy UDF and DAT to supplier directory to activate template
- **NOTE:** All variable dimensions to be controlled in data file require a custom symbol name.
- **NOTE:** Open “Getting-Started” document for more information.




Enhancement

What

- Allow additional variable dimensions and parameters in blank data file (*.dat)
- <https://redmine.buw-soft.de/issues/9953>

Why

- Customer specific templates sometimes need to control additional dimensions or parameters – for example if holder or order number are part of electrode blank



How

- To use additional parameters with data file an additional line “VALUETYPE” has to be added between “INSTANCE” and blank sizes.

INSTANCE	A_BASE	B_BASE	FRAME_WIDTH	FRAME_HEIGHT	A_HOLDER	B_HOLDER	PARAMINT	PARAMSTRING	PARAMDOUBLE
VALUETYPE	DIM	DIM	DIM	DIM	DIM	DIM	INTEGER	STRING	DOUBLE
E-15-15	15	15	1	3.2	15	15	1515	E-15-15	15.15

- Available types:
 - DIM → Creo dimensions like A_BASE, B_BASE, LENGTH, base height D2 and additional dimensions
 - INTERN → internal values used for calculation and advanced settings like D1, D3, MATERIAL, MFG_TEMPLATE, HOLDER, ...
 - INTEGER → integer parameter
 - STRING → string parameter
 - DOUBLE → double parameter
- **NOTE:** open “Getting-Started” document for more information

Improvement

What

- Adjusted behavior for default values from parameter configuration.
- <https://redmine.buw-soft.de/issues/12025>

Why

- Until now there have been two different behaviors for default values if...
 - defined in sel_list.txt or

```
SPARK_MODE ... &priority
```

```
#PRIORITY  
Normal wear  
Low wear  
Normal wear  
High removal
```

- defined in parameter.cfg directly

```
SPARK_MODE ... Normal wear
```

How

Now in both cases...

- default value defined in parameter.cfg and
- default value defined in sel_list.txt

...the value from SMARTElectrode configuration will be used now. The value will be set regardless whether the parameter already exists in template for new electrodes or not.

Fixed error

Description

- Operations/origins unreadable if group changed.
- <https://redmine.buw-soft.de/issues/12010>

Cause

- SMARTElectrode expects a fixed sequence order in operation groups:
 - Reference Csys (this is the selected csys)
 - Default Csys (orientation like selected csys on assembly default; used to assemble new electrodes on)
 - Freeface datum plane (default position of electrode base)
 - Default start datum plane (default start position of electrode if not defined otherwise)
 - Default secure datum plane (default secure position of electrode if not defined otherwise)
 - Operation cosmetic for drawing (optional)

Solution

- SMARTElectrode tries now to identify features in group, but it's still recommended to keep the group unchanged.

