EMX 18.4.7.0

What's New?




Enhancement

- New "Apply bore depth rule (T5 overbore)" checkbox to apply additional bore depth value T5 on fluid components more flexibly
- In case an additional bore depth rule is defined in EMX Config Options, a new check box becomes visible!

COMPANY_ID	-	Company identifier used to activate hidden options.
COOLING_ADDITIONAL_BORE_DEPTH_RULE	<bore_diameter>*0.5+1	Rule for calculating the additional hole depth for the cooling hole. This is applied only when Use Curve l
CREATE_ASM_DRAWING	YES	In the Project dialog box, selects the Create assembly drawing check box, by default.
CREATE_ASM_REPORT	NO	In the Project dialog box, clears the Create assembly report check box, by default.

- Only in case the check box is selected the bore depth rule is applied to the T5 - AUTO_DEPTH dimension

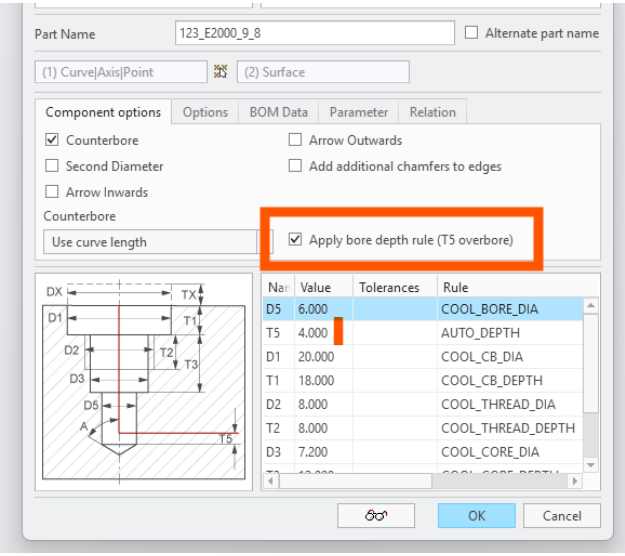


Enhancement

- Improve capabilities to suppress/resume subcomponents of assemblies in Component & Library Component Dialog
    - Subcomponents can be suppressed and resumed by variable options.
    - Subcomponent suppression is now displayed in option menu in Library Component Dialog.

  → Can be configured in the Component Editor

- Define Option
- Assign it in subcomponent table

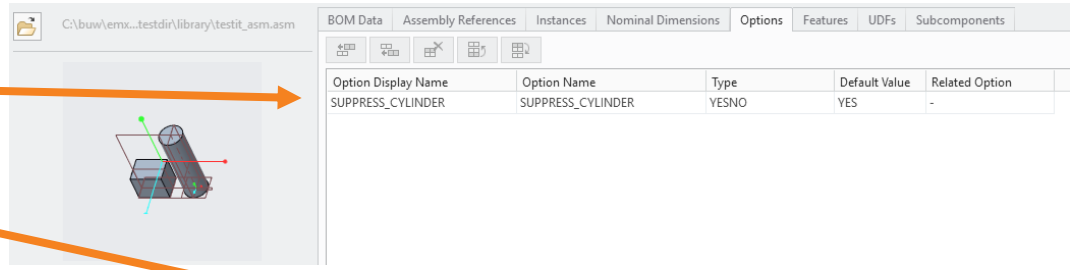

BOM Data | Assembly References | Instances | Nominal Dimensions | Options | Features | UDFs | Subcomponents


Component Name	Unit	Directory	Supplier	File Name	Type Name	Side	Suppress Option	Suppress Value
TESTIT_PART1	mm	library	-	TESTIT_PART1	TESTIT_PART1	-	SUPPRESS_CYLINDER	YES
TESTIT_PART2	mm	library	-	TESTIT_PART2	TESTIT_PART2	-		

- Rule-based suppression is visible in subcomponent option menu in Component Dialog

Enhancement

- Improve capabilities to suppress/resume subcomponents of assemblies in Component & Library Component Dialog


- Rule-based suppression is visible in subcomponent option menu in Component Dialog

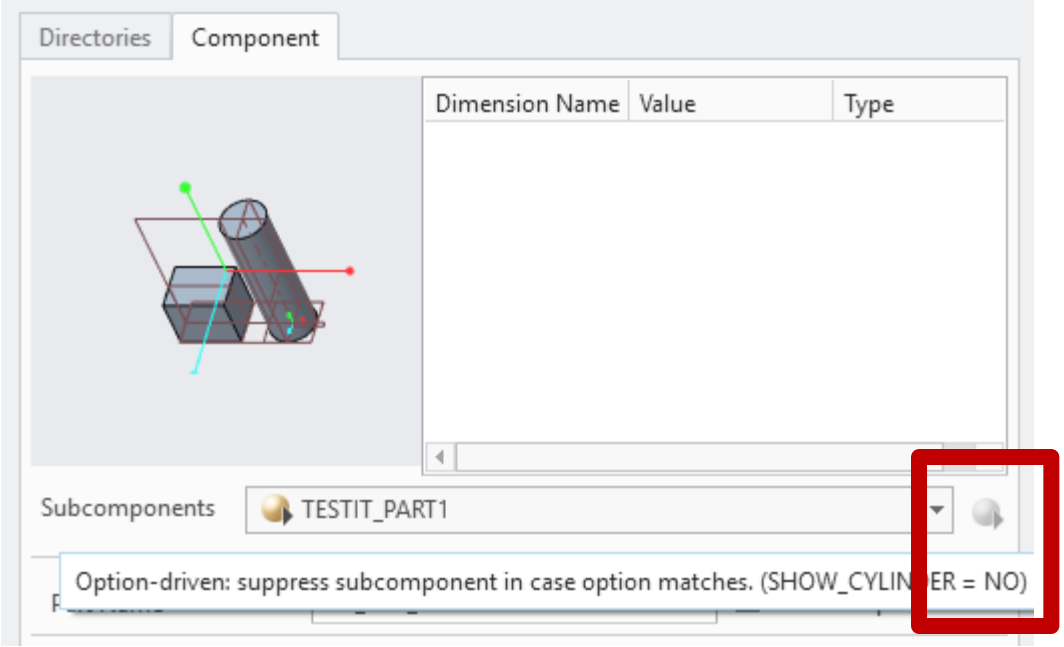

Enhancement

- Library Component Dialog: For Library components, only "Create Pattern" was possible but not "Pattern for all model".

→ Implement equal behavior like Component Dialog

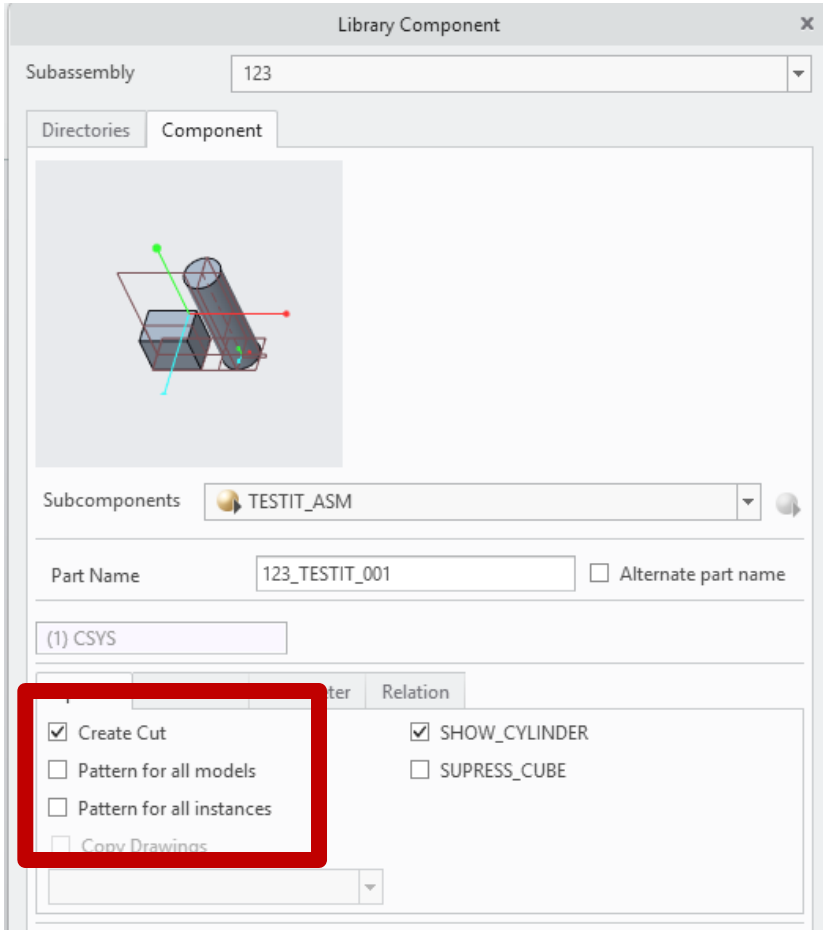

Enhancement

Improve Option USE_LAYER_FOR_SIDE_VIEWS behavior

→ It is possible to set EMX components now on both, Layer and Simprep, at the same time

- New config option CONFIG_SIDE_VIEW_DISPLAY_MODE with selectable values SIMREP | LAYER | BOTH
- Old option USE_LAYER_FOR_SIDE_VIEWS is deprecated and automatically converted

EMX 18.4.6.0

What's New?



Enhancement

- Update SmartHolechart to Version 18.4.6.0
- Implement Knarr sprue bushing 62408 and 62468

EMX 18.4.5.1

What's New?



Enhancement

- Meusburger components updated to state 6.2.16.0 Q-12026
- Add ISO 7380-2 flat head button screw

Enhancement

- New Misumi components
  - EPB
  - M-120KOC
  - JTWS, JTW
  - ORP, ORG
  - SLLK
  - V-15-1A5-T
  - C-CVPL, M-RCC
  - WFH, WLH, WHH, WMH
  - E-DTBB, E-DTBBU, DTBX, DTBXU

EMX 18.4.5.0

What's New?



Enhancement

- Update SmartHolechart to version 18.4.5.0


EMX 18.4.4.2

What's New?




Enhancement

- New EMX Component Search
  → New Search is available in **EMX Components Ribbon → Find**

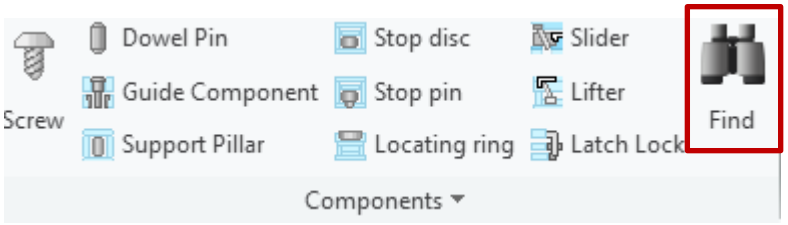


- Navigator contains:

Search results:

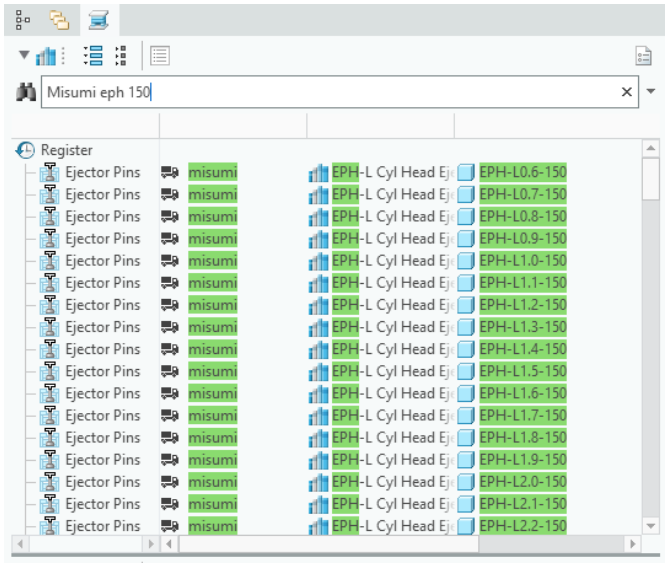

Favorites:

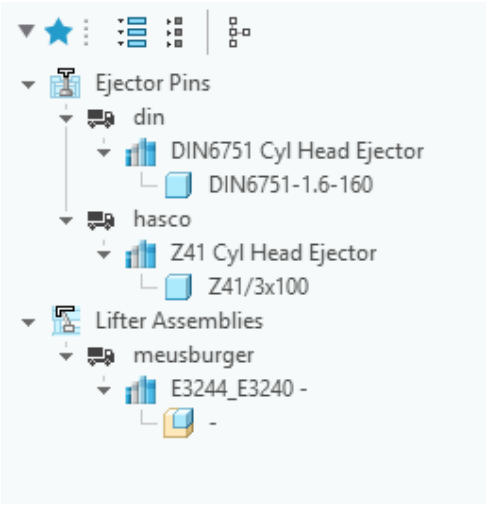

Favorites can also be added through Component Dialog

Enhancement

- New Meusburger cooling components E20761 and E20762
- Update existing Meusburger components to state 6.2.15.0
- Improved Bill of Material Excel export:
  - Allow Excel files with marcros (*.xlsm), templates (*.xltx) and templates with macros (*.xltm) for direct export from BOM.
  - Option EXCEL_TEMPLATE_PATH may point to a specific template file, for example: "%EMX_USER_CONFIG_PATH%configuration\bom-template.xlsm".
  - In this case export starts directly without showing a file browser. If necessary, option BOM_FILENAME will be used to generate a new file name for the Excel export.

EMX 18.4.4.0

What's New?



Enhancement

- New Knarr ejector pins 326121, 326121 DLC
- Update Knarr plates to state 2025
- Introduce new parameter default type &project_date to use the value defined in the project dialog

EMX 18.4.3.3

What's New?



Enhancement

- Predefined Components: Enable user to delete predefined auto screw and pin information from point.

- Component Editor Improvements:
    - Instance dimension can be added in case table cell is selected. It is not required to select column explicitly.
    - Part name rules: Side value can be selected from option menu.
    - Assembly references: Default reference value can be edited in table.

- Existing Meusburger components are updated to version 6.2.14.0 from November 2025.

- Meusburger web links support new Meusburger website.

EMX 18.4.3.0

What's New?




Enhancement


- Component Handling: Implement solution to delete only one component in case it was assemble multiple times.
- Situation: In case a component as create multiple times with “Reassemble component” or defined on a multiple point feature


→ Previous behavior: All components are deleted always

→ New behavior: It is possible to deleted only the selected instance

→ Delete all? No! → Only selected instances

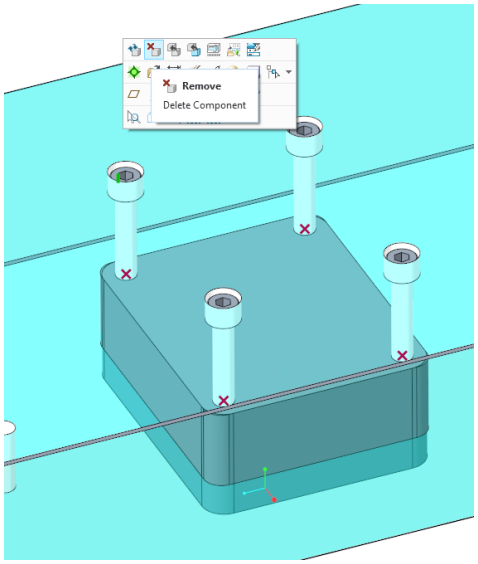

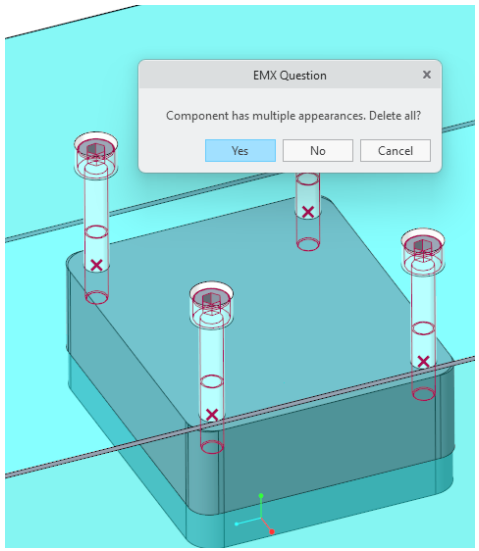

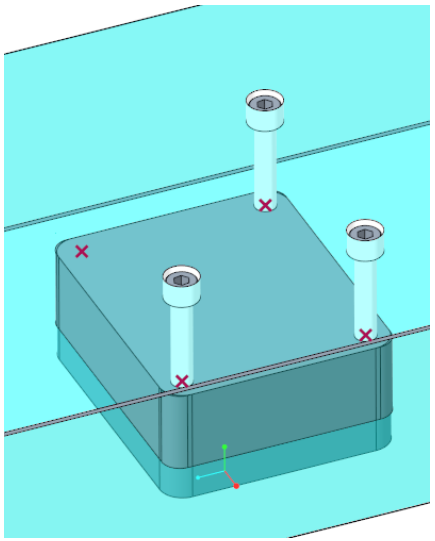


EMX 18.4.2.0

What's New?




Enhancement

- Component Dialog: Add right mouse button in nominal values and udf dimension table to set back manually edited values to default in edit fields and spin boxes.

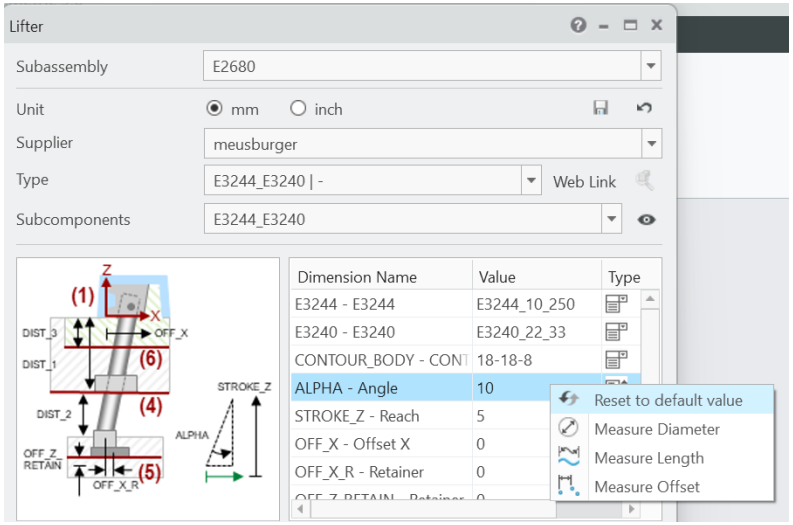


Nominal Value Table

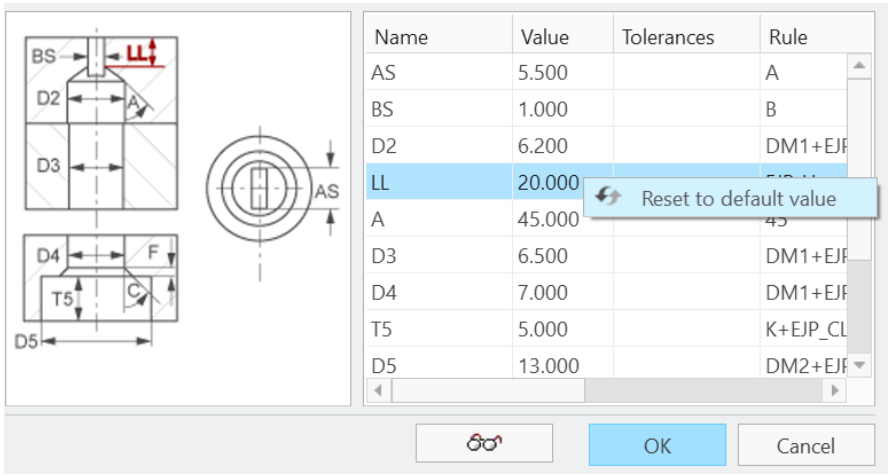

UDF Dimensions Table

Enhancement

- Component Editor: Add additional push buttons to component editor besides buttons on right mouse menu to improve usability.
  → Right-Mouse buttons still exist.

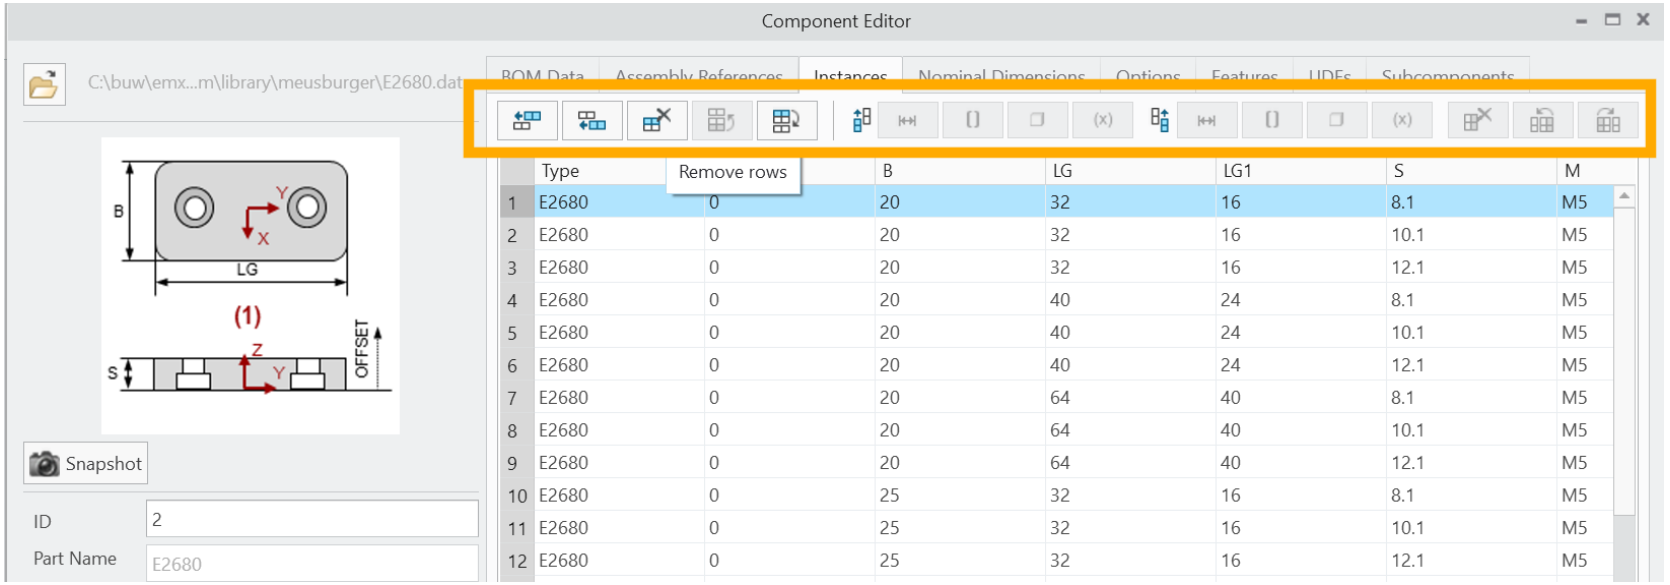

	Type		B	LG	LG1	S	M
1	E2680	0	20	32	16	8.1	M5
2	E2680	0	20	32	16	10.1	M5
3	E2680	0	20	32	16	12.1	M5
4	E2680	0	20	40	24	8.1	M5
5	E2680	0	20	40	24	10.1	M5
6	E2680	0	20	40	24	12.1	M5
7	E2680	0	20	64	40	8.1	M5
8	E2680	0	20	64	40	10.1	M5
9	E2680	0	20	64	40	12.1	M5
10	E2680	0	25	32	16	8.1	M5
11	E2680	0	25	32	16	10.1	M5
12	E2680	0	25	32	16	12.1	M5

Improvements

- Update SmartHolechart to Version 18.4.2.0
- Update existing Meusburger components to version 6.2.13.0
- Facelift for Wema and Ermanno Balzi cooling components.
  → Improve images and models
- “Remove all Ejector Pins” should not delete the return pin.
- Component Editor: Cut quilt can be selected from feature in model tree and not only from model in graphic window.

EMX 18.4.1.1

What's New?



Enhancement

- Implement HASCO cooling components Z814, Z878, Z8190, Z8190HT, Z8190HT-VA

- Implement KNARR ejector pins with ventilation 300133, 300133 DLC, 300533, 300533

EMX 18.4.1.0

What's New?





Enhancement

- Configuration option EJP_ENGRAVED_TEXT_SKETCH_TYPE:
  Add additional selectable options to suppress the solid text cutout and only show curves:
  a) contour_curve_text_only
  b) middleline_curve_text_only

- Update SmartHolechart to Version 18.4.1.0

Enhancement

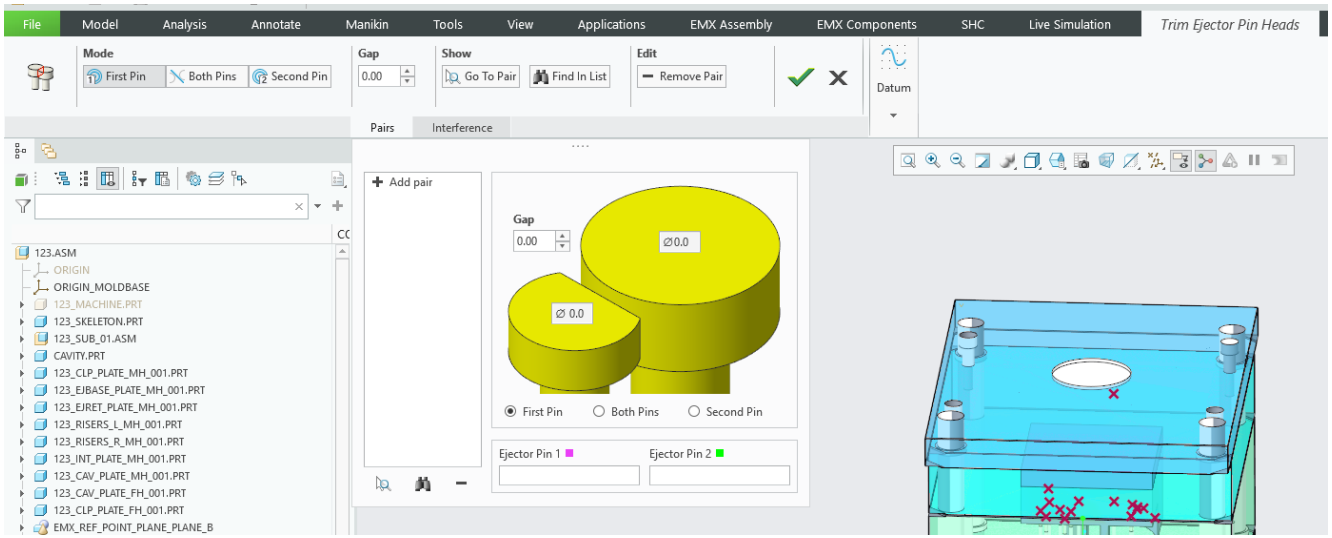

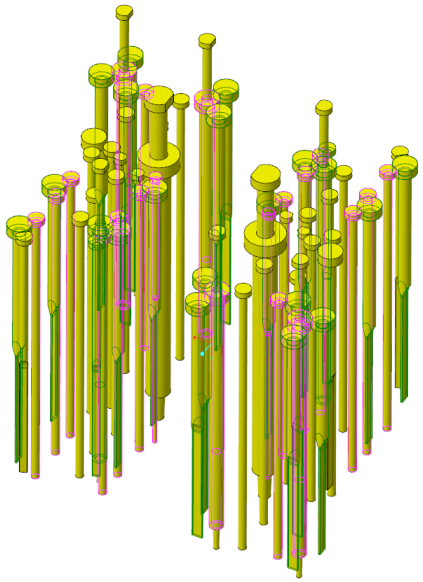

- Enhanced Trim Ejector Pin Heads capabilities
  - New Dashboard
  - Different trim shapes
  - Add and remove trim pairs
  - Manage existing pairs in list
  - Highlight pairs in 3D view

Enhancement

- Library components and related cutouts can be considered in Extract Fluid circuits command, in case parameter BELONGS_TO_WATERLINE=„YES“ exists at model.
- New Meusburger cooling components E2016, E20169, E20259, E2020HT, E2020 D and E20209HT
- Update all existing Meusburger components to state 6.2.11.0
- Improve performance of Excel export


EMX 18.4.0.0


What's New?




Enhancement

- Improve the Extract fluid circuit functionality
    1. Improve algorithm to detect related fluid bores
    2. Implement new radio group with option to assemble a subassembly for fixed and moving half, but also a part for each cooling circuit
    3. Use progress bar to avoid freezing of Creo window

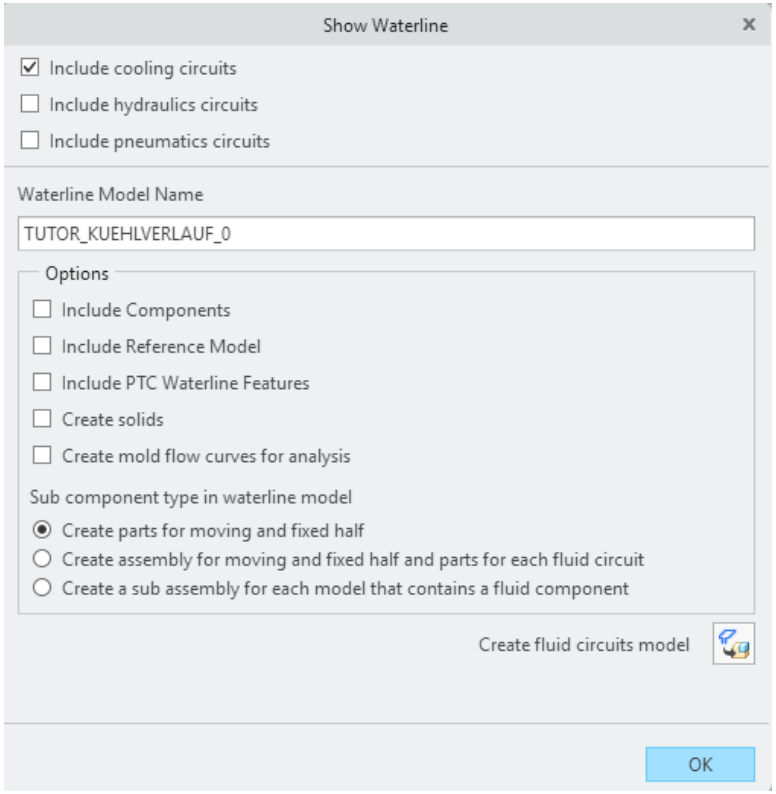

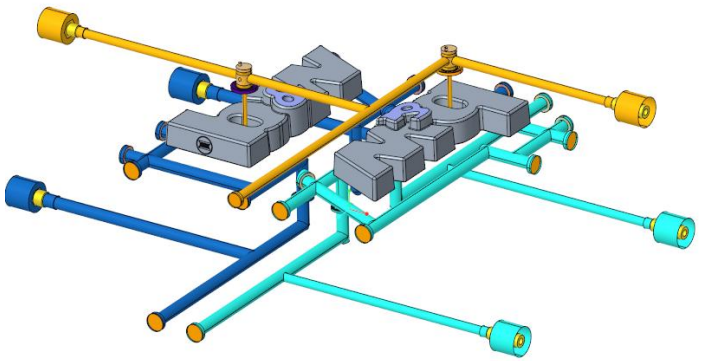


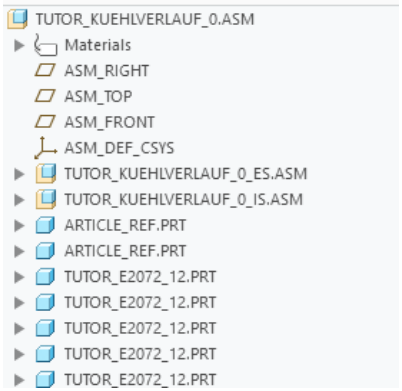

Enhancement

- Implement solution to directly use measured values from Tiny Measure Tools in nominal values of component dialog

    1. Select dimension in nominal values table
    2. Open Tiny Measure Tools with Right Mouse Click
    3. Measure diameter, length or offset
    4. Best fit value will be used in nominal value table

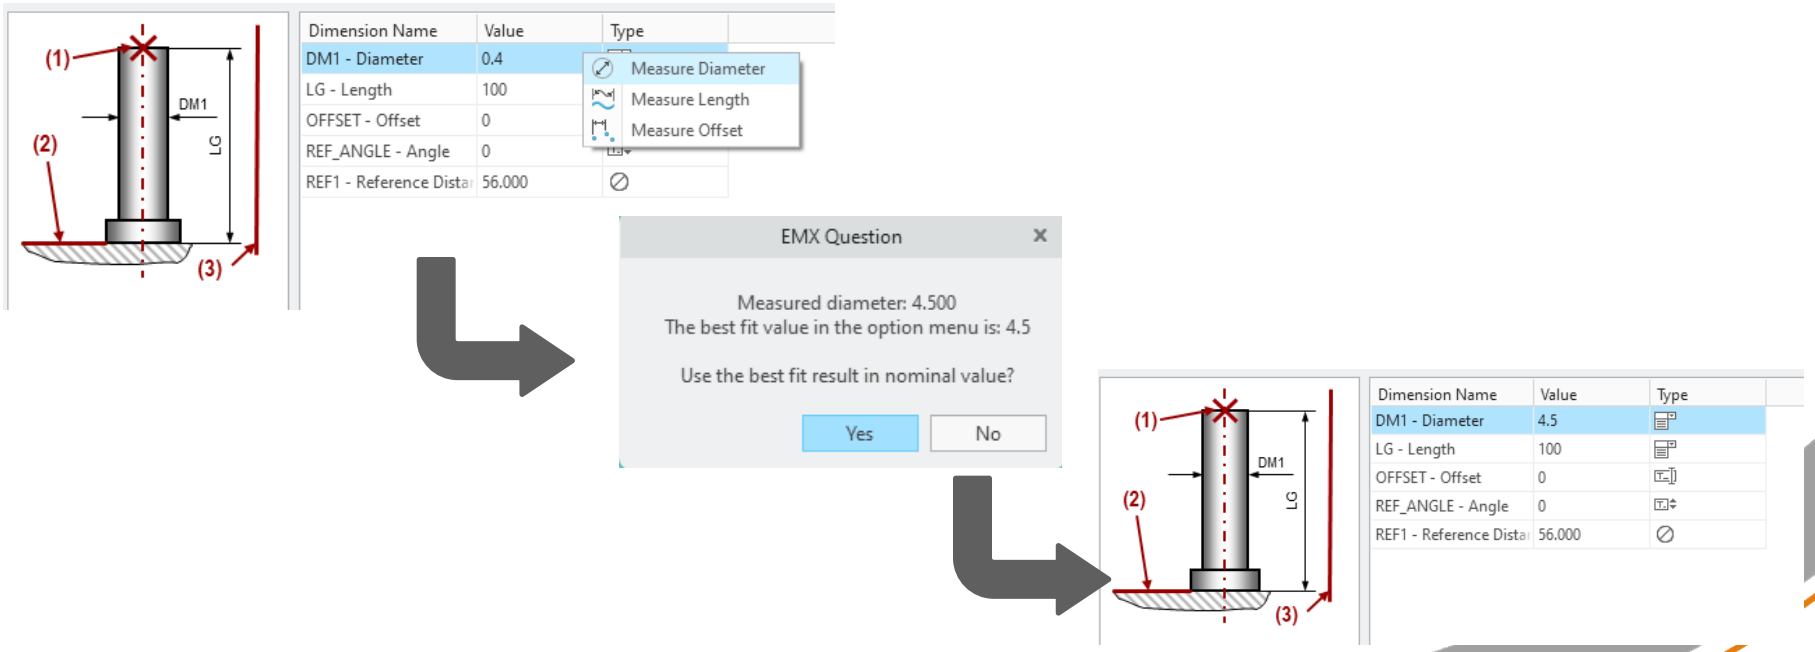

Enhancement

- New Components Meusburger Guide E1332 and E1146
- Implement new cooling O-rings from new suppliers Hagenauer and Arcus
- Add Ermanno Balzi cooling component TR, TRI, RF, RFP, RL, RLS

Enhancement

New HASCO cooling components:

- Z87: Hose Nipple
- Z87VA: Hose Nipple, stainless steel
- Z9425: Sealing plug with O-Ring
- Z9425VA: Sealing plug with O-Ring, stainless steel
- ZI81: Hose Nipple, Open Flow, USA

EMX 18.2.0.0

What's New?



Enhancement

- Implement new config option BOM_ALLOW_EDIT_PROJECT_PARAMS to allow manual editing of project parameters in BOM


Default Value is: NO

Behavior NO:
- Project parameters are disabled in Bill of Materials List.
- Value can not be edited
- Value is always overwritten from top assembly

Behavior YES:
- Project parameter can be edited in Bill of Materials
- Value needs to be unlocked in BOM

Enhancement

- Introduce functionality to save configuration to current session only. “Current Session” can be selected in Options Dialog from option menu

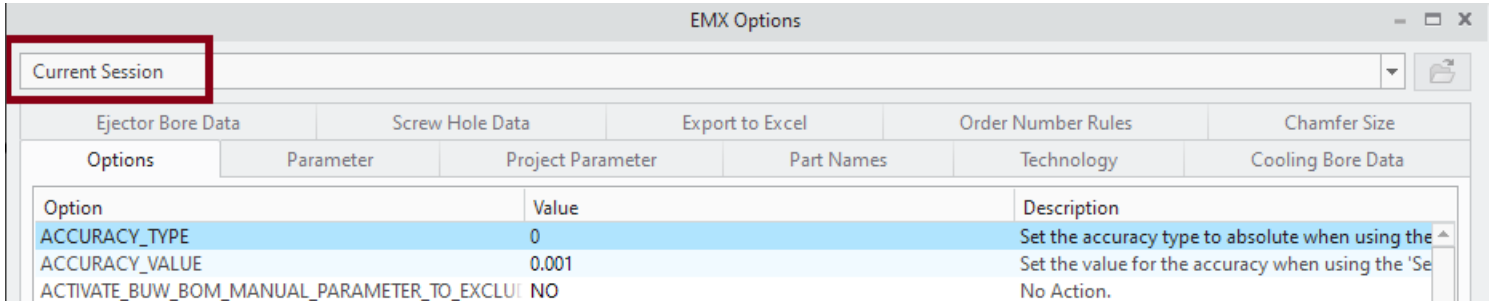

- Allow flexible items for guide components
- Several minor fixes and internal improvements

EMX 18.1.0.0

What's New?




Enhancement


- Several fixes
- Update existing MEUSBURGER components to state April 2024
- Enhancements for Engraved Texts for ejector pins:
    - New Options EJP_ENGRAVED_TEXT_TYPE: Sketch can be created as contour or middle line.
    - Parameter defined in PARAM_EJP_ENGRAVED_TEXT will only be created at ejector pin models.

Enhancement

New Feature: Assemble engraved texts for Ejector Pins

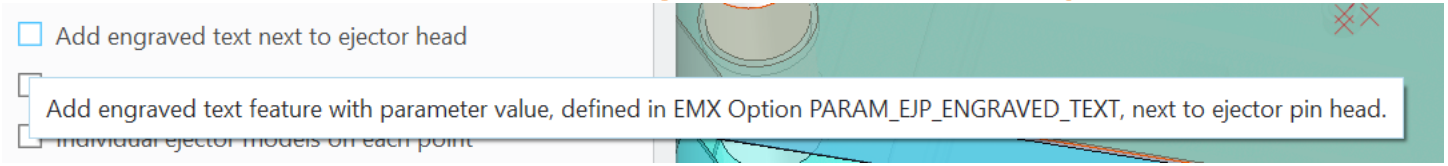

- New Option in Ejector Dialog: *Add engraved text next to ejector head*
- Text feature will be created in ejector model on head surface and next to head cutout UDF in plate.
- Text is controlled by relation and driven by a part parameter
- Part parameter must be defined with new Configuration Option *PARAM_EJP_ENGRAVED_TEXT* otherwise option in ejector dialog is disabled.
- New config file: *engraved_text_heights.cfg* to define valid text heights

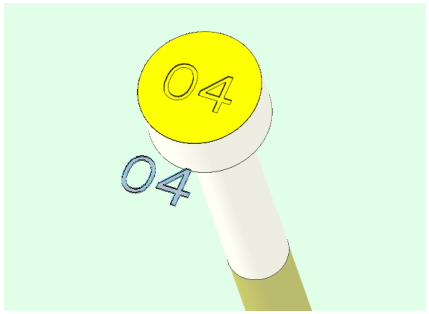

EMX 18.0.0.0

What's New?



Enhancement

- EMX ready for Creo 12.0.0.0